

09-13-00

A

PATENT APPLICATION
IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
UTILITY PATENT APPLICATION TRANSMITTAL LETTER

Atty./Agent Docket No.: CE03978R

Mailing Date: September 12, 2000

Express Mail Label No.: EK414665240US

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing under 37 CFR 1.53 (b) is a Nonprovisional Utility Patent Application:

☒ New Application; or

☐ Continuation; or ☐ Divisional, or ☐ Continuation-in-Part (CIP) Application of prior US application No. _____, filed on _____, having US Examiner _____, in Group Art Unit _____ of _____

Inventor(s): Hyziak et al.

For (Title): Method for Reducing Analog Facsimile Call Duration Over CDMA

This transmittal letter has 2 total pages.

Enclosed are:

☒ 3 sheets of drawings, along with 20 pages of specification, claims, and abstract.☒ Oath or Declaration Combined with Power of Attorney (4 pages)☒ Newly Executed (original or copy)☐ Copy from a prior application (if this is a Continuation/Division with no new matter)☐ Statement deleting named inventor(s) in prior application if this is a☐ Continuation/Division (See 37 CFR 1.63(d)(2) and 1.33(b).)☐ Consider as the above Statement, Please delete as inventors for this application the following inventors named in the prior application: _____

☐ Foreign priority to _____ Patent application having serial number _____, and a filing date of _____ is hereby claimed under 35 USC 119.

☐ A copy of the priority document is included herewith.☒ An Assignment Transmittal Letter and Assignment of the invention to MOTOROLA, INC.☐ An Information Disclosure Statement (IDS), with _____ PTO-1449, and _____ citation copies.☐ Petition For Extension of Time for parent application of the present Continuation/Division/CIP application☒ Print EFS Inventor Information Sheet(s).

JC872 U.S. PTO
09/12/00

JC841 U.S. PTO
09/660112
09/12/00

☒ Return Receipt Postcard

☐ Preliminary Amendment

☐ Please cancel filed claims _____.

☐ Incorporation by Reference (for Continuation/Division application) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

☐ Since the present application is based on a prior US application, please amend the specification by adding the following sentence before the first sentence of the specification: "The present application is based on prior US application No. _____, filed on _____, which is hereby incorporated by reference, and priority thereto for common subject matter is hereby claimed."

☒ The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CANCELED BY AMENDMENT

	NUMBER OF CLAIMS	NUMBER EXTRA	RATE	FEE
TOTAL CLAIMS	12 - 20 =	0	X \$18	= \$0.00
INDEPENDENT CLAIMS	2 - 3 =	0	X \$78	= \$0.00
MULTIPLE DEPENDENT CLAIMS			\$260	= \$0.00
			BASIC FEE	= \$690.00
			TOTAL FILING FEE	= \$690.00

☒ Please charge Deposit Account No. 13-4772 in the amount of \$ 690.00 for the Total Filing Fee.

☒ The Commissioner is hereby authorized to charge any additional fees which may be required now or in the future under 37 CFR 1.16 or 37 CFR 1.17, including any present or future time extension fees which may be required, or credit any overpayment to Deposit Account No. 13-4772

☒ One additional copy of this sheet is enclosed

Please forward all correspondence to:

Customer Number **22917**

By: 

Kenneth A. Haas
Attorney for Applicant(s)
Registration No. 42,614
MOTOROLA, INC.
Phone: (847) 576-0379
Fax: (847) 576-3750

JC841 U.S. PRO
09/660112
09/12/00

INVENTOR INFORMATION

Inventor One Given Name:: Janusz
Family Name:: Hyziak
Postal Address Line One:: 9352 Margail
City:: Des Plaines
State or Province:: IL
Country:: USA
Postal or Zip Code:: 60016
City of Residence:: Des Plaines
State or Province of Residence:: IL
Country of Residence:: USA
Citizenship Country:: USA
Inventor Two Given Name:: Saurabh
Family Name:: Rastogi
Postal Address Line One:: 39 Ankur Apartments, 7
City:: Patpar Ganj
State or Province:: Delhi
Country:: India
Postal or Zip Code:: 110092
City of Residence:: Patpar Ganj
State or Province of Residence:: Delhi
Country of Residence:: India
Citizenship Country:: India
Inventor Three Given Name:: Scott
Family Name:: Finkle
Postal Address Line One:: 1345 Meyer Road
City:: Hoffman Estates
State or Province:: IL
Country:: USA
Postal or Zip Code:: 60194
City of Residence:: Hoffman Estates
State or Province of Residence:: IL
Country of Residence:: USA
Citizenship Country:: USA

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 22917
Fax One:: (847) 576-0379

APPLICATION INFORMATION

Title Line One:: Method for Reducing Analog Facsimile Cal
Title Line Two:: 1 Duration Over CDMA
Total Drawing Sheets:: 3
Formal Drawings?:: Yes
Application Type:: Utility
Docket Number:: CE03978R

METHOD FOR REDUCING ANALOG FACSIMILE CALL DURATION OVER CDMA

FIELD OF THE INVENTION

5 This invention relates to wireless communication systems. In particular, this invention relates to a method for reducing the time required to complete an analog facsimile transmission over a CDMA cellular telephone system.

BACKGROUND OF THE INVENTION

10 Cellular telephone systems are well known. In many parts of the world, including the United States, cellular systems now provide two-way telecommunications capability that is regularly provided elsewhere by land-line telephone systems. In addition to voice communications, cellular telephone systems also carry facsimile message traffic.

15 In a fax transmission, a page of a document is optically scanned to produce electronic signals representative of the page's image. The signals are transferred across a switching network to another fax machine whereat the electronic signals from the first fax machine are processed to reproduce a near-perfect likeness of the document page that was optically scanned by the fax machine at the sending end.

20 Fax transmission in the U.S. and elsewhere comply with the International Telecommunications Union (ITU) standard no. ITU-T.30. ITU standards are readily available from the ITU web site at *www.itu.org*.

A problem with sending a fax transmission via a CDMA wireless network is that most fax transmissions are indeed analog signals comprised of tones that

represent the images on a page being copied and transmitted. Stated alternatively, fax transmissions on a wireline communications system comply with T.30; fax transmissions on a wireless CDMA system comply with a different standard known as the I707 standard for CDMA cellular systems, which is a digital system.

- 5 Accordingly, when transmitting a fax over CDMA, the analog ITU-T.30 fax protocol must be converted during the transmission process to a digital standard or protocol by which the analog fax signals can be carried over a digital cellular transport. Transmitting an analog fax over a CDMA cellular system also requires that certain control messages sent between the fax machines be completely
- 10 assembled at the CDMA gateways, thereby increasing the time required to complete a fax transmission.

A method of reducing an analog fax transmission over a CDMA cellular system would be an improvement over the prior art.

SUMMARY OF THE INVENTION

- 15 There is provided a method for reducing the time required to transmit an analog fax over a CDMA cellular system. Analog facsimile protocols are well defined in the International Telecommunications Union Standard T.30. This standard prescribes how an analog fax machine is to communicate with another ITU-T.30-compliant fax machine via standard telephone lines. The T.30 standard
- 20 requires the transmission of a preamble message prior to the transmission of certain fax control signals.

Improved synchronization and reduced transmission time is achieved by detecting the beginning of an ITU-T.30 preamble message at the entry point of a

CDMA cellular system. Instead of waiting for the complete reception of a preamble message and the subsequent control messages, upon the detection of an ITU T.30 preamble, the CDMA terminal equipment generates a new, preamble message indicator or "PMI" that can be sent across the CDMA network on a high-speed data link and which indicates to the cellular network that a T.30 preamble message has been detected by the CDMA system. Upon detecting the PMI at the exit point of the CDMA cellular system, the CDMA infrastructure equipment (and without waiting for subsequent control messages following the preamble to be received) re-generates a new T.30 preamble that is sent to the analog fax machine coupled to a CDMA cellular system, for a mobile-to-land call. End-to-end transmission time is reduced by eliminating the need to completely receive a T.30 preamble message and subsequent control messages before starting the preamble at the message destination.

SUMMARY OF THE DRAWINGS

Figure 1 is a simplified block diagram of a portion of a cellular communication network by which an analog facsimile transmission is enabled over a CDMA cellular network.

Figure 2 shows a simplified flow diagram of the prior art message sequence timing of an ITU T.30-compliant fax transmission over a CDMA network.

Figure 3 shows a simplified flow diagram of the ITU T.30-compliant message sequence timing of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

An advantage of the invention over the prior art is reduced facsimile transmission time. In order to appreciate message sequence time, the network over which a facsimile transmission is carried is shown in Figure 1, which is a simplified block diagram of a communication system 100 by which an analog facsimile transmission is carried over a wireless CDMA communications system.

An ITU-T.30-compliant analog fax machine 102 is coupled to a wireless CDMA telephone set 104, which is frequently referred to as a fixed wireless terminal. The CDMA fixed wireless terminal 104 communicates with a CDMA cellular telephone network infrastructure using CDMA (insert) modulation, which is not germane to an understanding of the invention and therefore not shown but otherwise known to those skilled in the art. The infrastructure 106 detects and decodes the CDMA modulation and routes the call through a switching system or through other infrastructure equipment 108 to another ITU-T.30-compliant analog fax machine 110 (the receiving fax machine).

Figure 2 shows a flow diagram 200 of the messages exchanged in an ITU-T.30-compliant fax transmission over a CDMA network using prior art techniques.

In Figure 2, the vertical line 202 on the left side of the drawing (and which is labeled "MOBILE") identifies the logical boundary of the combination of an analog fax machine and CDMA fixed wireless terminal 102, 104 depicted in Figure 1. Depending upon the orientation of the lines and arrowheads, the solid and broken lines intersecting the vertical "MOBILE" line 202 represent signals

that are sent to or from the combination of the wireless terminal / analog fax machine from which a document is to be sent (i.e. the sending fax) to another analog fax machine 110 that is referred to herein as the receiving or land-line fax, represented by the vertical line 204 on the extreme right-hand side of Figure 2

5 drawing under heading "LAND LINE FAX."

Between these two fax machine lines 202, 204 are two vertical lines labeled "TX" 206 and "RX" 208 which represent the entry and exit points (or boundaries) of the CDMA wireless system. The "TX" line 206 denotes the entry point of the CDMA system for the sending fax machine. Signals to and from the sending fax machine, as represented by the various inclined line segments, are with respect to the TX end of the CDMA system. The "RX" line 208 denotes the entry point of the CDMA system for the receiving fax machine 110. Signals to and from the receiving fax 110 are with respect to the RX end of the CDMA system.

15 Signal timing is shown by way of the intersection of the inclined line segments with the vertically-oriented lines demarked as TX, RX, etc.

As shown in the flow diagram of Figure 2, (which is an exemplary message sequence of a single ITU-T.30 mobile-to-land fax call and therefore not necessarily representative of the timing of all such calls, the timing of which will vary according to image content, fax machine specifications by manufacturer and RF conditions) several different messages are exchanged before an image is actually transmitted. The signaling that is exchanged between two fax machines is specified in the ITU T.30 standard.

At time T_0 , the receiving fax machine (identified in Figure 1 by reference numeral 110) has just answered an incoming call (placed by the sending end fax machine that is identified by reference numeral 102 in Figure 1). 2.2 seconds later, the receiving fax completes sending a T.30-compliant preamble 210

- 5 followed by the T.30 NSF, CSI and DIS messages 212 to the CDMA infrastructure RX boundary. These messages are always preceded by a preamble message 210, which is typically several bytes in length.

- (The "CSI" message is the Called Subscriber Id, that is sent by the answering fax machine to identify itself. The "DIS" message is the Digital Id
10 Signal, and is sent by answering fax machine specifying its capabilities, including communication speeds, paper size, and resolution. "NSF" refers to the Non-Standard Facilities message that is sent by answering device, conveying any proprietary information for two compatible devices to improve transmission.)

- After the CDMA RX infrastructure equipment (at line 208) receives the
15 NSF, CSI and DIS messages 212 from the receiving fax 110, the messages are sent across the CDMA system to the TX end of the link (at line 206) which requires about 0.1 seconds of time. Accordingly, 2.3 seconds after the RX end (at line 208) of the CDMA network detected that the receiving machine answered the call, the TX end (at line 206) of the CDMA infrastructure has received the CSI
20 and DIS messages 212, (the NSF message is dropped at the RX terminal equipment at line 208) which are then passed along to the sending fax machine 102.

2.2 seconds after the TX end (at line 206) of the CDMA network sends the CSI and DIS messages 212, the sending fax 102 sends its own TSI and DCS messages 214, to the TX end (at line 206) of the CDMA network following a message preamble 216. (The “TSI” message is the Transmitting Subscriber Id data sent by originating fax. DCS or Digital Command Signal, also sent by
5 originating fax machine, conveys any parameters that were up to that point negotiated by the two machines.)

TSI and DCS messages 214 from the sending fax 102 at the RX end (at line 208) traverse the CDMA network asynchronously with respect to the RX
10 time, but are nevertheless expected by the receiving fax 110. During the 5.2 seconds after the receiving fax machine 110 first answered, it expected a response to its first transmission of its NSF, CSI and DIS messages 212. The unanswered transmission of NSF, CSI and DIS messages 212 precipitates a retransmission of these messages 218 by the receiving fax machine.

15 An inspection of the messages received at the RX end (at line 208) of the CDMA system approximately 6.8 seconds into the call reveals that while the RX end is receiving the TSI and DCS messages 214, the receiving fax 110 is trying to re-send new NSF, CSI and DIS messages 218, resulting in a message collision at the RX end (at line 208) of the CDMA network. Approximately 0.5 seconds after
20 the TSI and DCS messages 214 were first received at the RX end (at line 208), the TSI and DCS messages 214 are forwarded to the receiving fax 110 by the CDMA infrastructure.

As the TSI and DCS messages 214 are making their way across the CDMA network to the receiving fax machine 110, the sending fax machine 102 begins to send a synchronization training messages "TCF" 220. At the RX end (at line 208) TCF 220 is sent to the landline fax, thereby causing the receiving fax

5 110 to send a preamble 222 followed by the CFR signal 224 (confirmation to send— sent by receiving fax machine to indicate that the training TCF sequence was received properly) approximately 11.5 seconds after the call was first answered.

Approximately 0.2 seconds after the CFR 224 is sent from the RX end (at

10 line 206), it is received at the TX end (at line 208), 224 and sent to the sending fax 102, 224. Because the sending fax 102 expected a response to its first transmission of TSI, DCS and TCF 214 and 220 but a response was not received, the sending fax re-sends the TSI and DCS messages 228, following a preamble 226, which is in turn followed by another TCF message 230, all while the CFR

15 signal 224 is crossing the CDMA network boundary at line 206.

After resolving the signal collisions within the CDMA TX-side equipment, approximately 16.8 seconds into the call, the CFR 224 has been sent to the sending fax machine from the TX end of the CDMA network (at line 206 to line 202). 1.5 seconds later, image data 232 from the sending fax machine 102 (at line

20 202) is received at the TX terminal (at line 206) of the CDMA network whereupon image data 232 is sent across the CDMA network, lasting about 58 seconds for the example shown in Figure 2. (Transmission time of an image is highly variable, depending upon image content.)

77.7 seconds into the call, the TX end of the CDMA network receives an EOP 234 (end of procedure, indicating data transmission has concluded) following another preamble 236. Approximately 2.0 seconds later the RX end (at line 208) of the CDMA network receives the EOP 234 at line 208 and forwards the EOP 234 to the receiving fax 110 at line 204. 1.3 second later, i.e. 81 seconds into the call, RX receives a MCF (message confirmation) 240 following a preamble 238. The MCF 240 is sent through the CDMA network to the TX end (at line 206). Because the MCF 240 was not promptly received, the sending fax 102 re-sends the EOP message 242 following a preamble 244, which collides with the MCF message 240 at the TX end (at line 206) of the CDMA network. Approximately 83.6 seconds into the call, the TX end of the CDMA system has sorted out the message collisions and forwarded to the sending fax 102, the MCF message 244, which is then followed by the DCN message 246, closing the link between the two fax machines.

Those skilled in the art will recognize that the various ITU T.30 control messages exchanged between the fax machines are, with few exceptions, preceded by preamble message blocks. In the prior art, the message preamble and the message data must be received and decoded before further transmission takes place. A significant transmission time savings can be realized if the CDMA infrastructure is capable of recognizing a T.30 message preamble and immediately sending instead, a preamble message indicator or "PMI" over a high-speed data link. Stated alternatively, when an ITU T.30 preamble message from either fax machine is detected at the CDMA system boundaries, the CDMA system sends a

preamble message indicator via a high speed data link, without waiting for the complete preamble or the message content to be received. In the invention, a T.30 message preamble is recognized by the well-known format of a T.30 preamble. In the preferred embodiment, recognizing as few as four or five bytes out of a 36-40 byte preamble can form the basis of a decision that an incoming message is a preamble. In the preferred embodiment, the number of bytes that are tested for conformance to the T.30 preamble format is variable so that depending upon channel noise or other signal characteristics, a decision of whether a stream of bytes is a preamble can be adjusted appropriately.

- 10 Analog facsimile transmission time reduction via a CDMA cellular system is more fully appreciated upon inspection of Figure 3, which depicts the timing improvement realized by using a CDMA system-generated PMI message.

- With respect to Figure 3, which depicts the message timing of a single, exemplary fax call via a CDMA system using a system-generated PMI, at time T_0 the RX side of the CDMA system detects the receiving fax machine's transmission of a preamble 301 that precedes the CSI and DIS messages 304. When the preamble 301 is detected, (which is preferably achieved by the CDMA infrastructure equipment by recognizing only a few bytes of a preamble message using pattern recognition) the CDMA system at the RX end (at line 208) immediately sends a PMI 302 (preamble message indicator, which is a message that is shorter in time (or possibly byte count or length) than a T.30 preamble) to the TX side of the CDMA system via a high-speed data link (not shown) precluding the necessity of having the TX side equipment wait until the preamble

301 and the following CSI and DIS messages 304 are completely received at the RX end (at line 208).

Having received only the PMI 302, CDMA network TX equipment recreates the multi-byte T.30 preamble 305, which under the ITU standard,
5 precedes the CSI and DIS messages 306 sent from the TX end (at line 206) to the mobile fax (at line 202) so that as these messages are received at the TX side 206, the CSI and DIS messages 306 can be forwarded soon after to the mobile fax terminal, i.e. the sending fax machine 102. In the example shown in Figure 3, approximately 2.1 seconds of time can be realized over the example shown in
10 Figure 2 by sending the PMI via high speed link.

After the sending fax 102 receives the CSI and DIS messages 306, the sending fax 102 will respond with a preamble 309 and its TSI and DCS messages 310. When the TX side of the CDMA network first detects the preamble 309 from the sending fax machine 102, the TX side of the CDMA system generates a
15 PMI message 308 that is sent to the RX side (at line 208) of the CDMA system via a high-speed data link RF connection between the RX and TX ends 206 and 208.

As described above, when the RX side of the CDMA system receives the PMI 308 from the TX side of the CDMA system, the RX equipment of the CDMA system re-creates a multi-byte T.30 preamble 311 which is followed by
20 the TSI and DCS messages 310 that were generated by the sending fax machine 102 in response to the receiving fax machines CSI and DIS messages 306. As shown in Figure 3, the TSI and DCS messages 310 are received at the RX side of the CDMA system and sent to the receiving fax machine 4.6 seconds after the

receiving fax machine 110 first starting sending a preamble 301, whereas the prior art system required substantially a minimum of 7.4 seconds.

After the receiving fax machine receives the TSI and DCS messages 310, followed by TCF 312, the receiving fax machine 110 generates a preamble 314 followed by a CFR message 316. When the RX equipment (at line 208) of the CDMA system detects the preamble 314 ahead of the CFR message 316, another PMI 318 is generated by the RX equipment (at line 208) that is forwarded to the TX side. 1.3 seconds after the RX side of the CDMA system sends the PMI 318, the receiving fax machine's CFR message 316 is sent to the TX side of the CDMA system. Inasmuch as the TX side already received the PMI 318, the TX side re-creates a T.30 message preamble 320, which is followed by the CFR message 316 sent from the TX side (at line 206). Upon receipt of the CFR message 316 from the TX side, the sending fax machine 102 begins sending image data 322, approximately 9.5 seconds after the receiving fax machine 110 first started sending its first preamble 301 at time T_0 . By preemptively sending preamble message indicators 302, 308, 318, 330 instead of actual preambles, and by sending the PMI over a high-speed link, a significant amount of time can be saved in an analog facsimile call. The prior art methodology required as much as 18.5 seconds to begin sending image data, which in the example shown, takes 58 seconds.

Upon the conclusion of the image data transmission 324, the sending fax machine 102 will send an EOP message 326, which is also preceded by a preamble 328. Instead of the preamble 328, the TX CDMA equipment (at line

206) sends a PMI 330. When this PMI 330 is received at the RX side of the CDMA system (at line 208), the CDMA system re-creates the multi-byte T.30 message preamble 332 to be sent to the receiving fax machine ahead of the EOP 326. As shown in Figure 3, the EOP 326 is sent to the receiving fax machine 110 approximately 70.9 seconds after T_0 .

As before, upon receipt of the EOP 326, the receiving fax 110 issues an MCF message 334 preceded by a preamble 336. Using the same methodology, a PMI 338 sent in place of an actual T.30 preamble allows the CDMA system to re-create a preamble 340 at the TX side followed immediately by the MCF message 334.

At least one alternate embodiment of the invention will include error handling. In the case wherein a T.30 message preamble is received at a CDMA terminal, but the subsequent control messages are missing or corrupted, the CDMA terminal can optionally terminate the preamble message transmission thereby reducing time that would otherwise be wasted waiting for the preamble message to be fully received by the recipient fax machine. In yet another embodiment, the preamble message itself might be corrupted in which case a data terminal that detects a corrupted preamble can send an error message (PR-TERM_P message) to a subsequent data terminal upon detecting that the message preamble was corrupted, after which a remote terminal can cease to generate the message preamble signal and terminate the preamble+message sequence. In yet another embodiment, at the receiving fax end, after receiving a preamble message indicator, the T.30 preamble message is re-generated. If after some empirically-

determined length of time a control message does not follow the PMI, the second CDMA terminal can terminate the re-generation of the T.30 preamble.

By using a high-speed PMI instead of sending the actual preamble messages the time required to send an analog fax across a CDMA network can be
 5 reduced to approximately 73 seconds where the prior art method required at least 83.6 seconds.

(11)
 (12)
 (13)
 (14)
 (15)
 (16)
 (17)
 (18)
 (19)
 (20)
 (21)
 (22)
 (23)
 (24)
 (25)
 (26)
 (27)
 (28)
 (29)
 (30)
 (31)
 (32)
 (33)
 (34)
 (35)
 (36)
 (37)
 (38)
 (39)
 (40)
 (41)
 (42)
 (43)
 (44)
 (45)
 (46)
 (47)
 (48)
 (49)
 (50)
 (51)
 (52)
 (53)
 (54)
 (55)
 (56)
 (57)
 (58)
 (59)
 (60)
 (61)
 (62)
 (63)
 (64)
 (65)
 (66)
 (67)
 (68)
 (69)
 (70)
 (71)
 (72)
 (73)
 (74)
 (75)
 (76)
 (77)
 (78)
 (79)
 (80)
 (81)
 (82)
 (83)
 (84)
 (85)
 (86)
 (87)
 (88)
 (89)
 (90)
 (91)
 (92)
 (93)
 (94)
 (95)
 (96)
 (97)
 (98)
 (99)

We claim:

1. A method of reducing facsimile transmission duration on a CDMA cellular communications network comprising:

5 detecting at a first CDMA cellular terminal coupled to a first analog fax machine, a first multi-byte message preamble that identifies the first element of a sequence in a facsimile control message transmission;

10 sending from said first CDMA cellular terminal to a second CDMA cellular terminal coupled to a second analog fax machine, a preamble message indicator, said preamble message indicator signaling to said second CDMA cellular network terminal the beginning of an analog facsimile control message transmission;

15 at the second CDMA cellular terminal, re-generating said first multibyte message preamble to said second analog fax machine upon the receipt of said preamble message indicator.

2. The method of claim 1 further comprising the steps of:

20 sending an analog facsimile control message from said first CDMA cellular terminal to said second CDMA cellular terminal after said reduced duration preamble indicator message is sent by said first CDMA cellular terminal;

at the second CDMA cellular terminal, sending said analog facsimile control message to said second analog fax machine.

3. The method of claim 1 wherein the step of detecting said message preamble at said first CDMA cellular terminal includes collecting a pattern of bytes for the duration of only a portion of said multi-byte message preamble.
- 5 4. The method of claim 1 further including the step of: detecting at said first data terminal that data following said message preamble early detection interval is defective; and sending a first error message to said second data terminal upon detecting that said message preamble was corrupt, after which the remote terminal may cease to generate the message preamble signal and terminate the
- 10 preamble+message sequence.
5. The method of claim 1 further including the step of: detecting at said first data terminal that the message following said message preamble is defective; and sending a first error message to said second data terminal upon detecting that
- 15 said subsequent message was corrupt.
6. The method of claim 1 further including the step of: at the remote end, upon starting the preamble signal to the fax machine, detecting a communications error when the intended subsequent message was not received; and thereafter
- 20 terminating said preamble message at the remote data terminal.
7. The method of claim 1 wherein said step of: detecting a first multi-byte message is comprised of the steps of:

receiving at a wireless CDMA terminal, an ITU-T.30 control
message;

detecting, by said wireless CDMA terminal, a predetermined
data sequence of a facsimile transmission message preamble ITU-T.30
format.

5

8. The method of claim 3 wherein the number of bytes of said multi-byte
message preamble that are detected is variable.

10 9. The method of claim 1 further including the step of: at the second CDMA
network terminal, upon receipt of a preamble signal indicator, detecting a
communications error when the intended subsequent message was not
received; thereafter terminating the multi-byte message preamble re-generated
at the second CDMA cellular network.

15

10. The method of claim 1 wherein said step of: detecting the beginning of a
facsimile transmission message preamble is comprised of the steps of:

receiving at a wireless CDMA communications terminal, an
ITU-T.30 control message;

20

detecting by said CDMA communications terminal, a
predetermined data sequence of a facsimile transmission message
preamble in said ITU-T.30 control message.

12. An apparatus for reducing facsimile transmission duration on a CDMA communications network comprising:

5 a first CDMA data terminal that detects a transmission message preamble identifying the beginning of an ITU T.30-compliant facsimile transmission message from a first analog fax machine, and which thereafter sends to a distant second CDMA data terminal, a reduced duration preamble indicator (PMI) message that signals to a second data terminal the beginning of a T.30 facsimile transmission;

10 a second CDMA data terminal that is capable of detecting said reduced duration preamble indicator message and in response thereto, initiating a T.30 preamble transmission to a second analog fax machine.

15

METHOD FOR REDUCING ANALOG FACSIMILE CALL DURATION OVER CDMA

ABSTRACT OF THE DISCLOSURE

5 Analog facsimile transmission message time can be significantly reduced over a CDMA network by preemptively sending a preamble message indicator (PMI) without waiting for the accumulation of entire preamble or messages that follow ITU T.30 preamble messages.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
21

FIG. 1 is a schematic diagram of a communication system 100. The system includes a base station 102, a mobile station 104, and a network 106. The base station 102 is connected to the network 106 via a cable 108. The mobile station 104 is connected to the network 106 via a radio link 110. The network 106 is represented by a tower structure. The base station 102 is also connected to a computer 104 via a cable 108. The computer 104 is connected to a printer 102 via a cable 108. The printer 102 is connected to a scanner 104 via a cable 108. The scanner 104 is connected to a fax machine 102 via a cable 108. The fax machine 102 is connected to a telephone 104 via a cable 108. The telephone 104 is connected to a modem 102 via a cable 108. The modem 102 is connected to the network 106 via a radio link 110. The network 106 is represented by a tower structure. The base station 102 is also connected to a computer 104 via a cable 108. The computer 104 is connected to a printer 102 via a cable 108. The printer 102 is connected to a scanner 104 via a cable 108. The scanner 104 is connected to a fax machine 102 via a cable 108. The fax machine 102 is connected to a telephone 104 via a cable 108. The telephone 104 is connected to a modem 102 via a cable 108. The modem 102 is connected to the network 106 via a radio link 110.

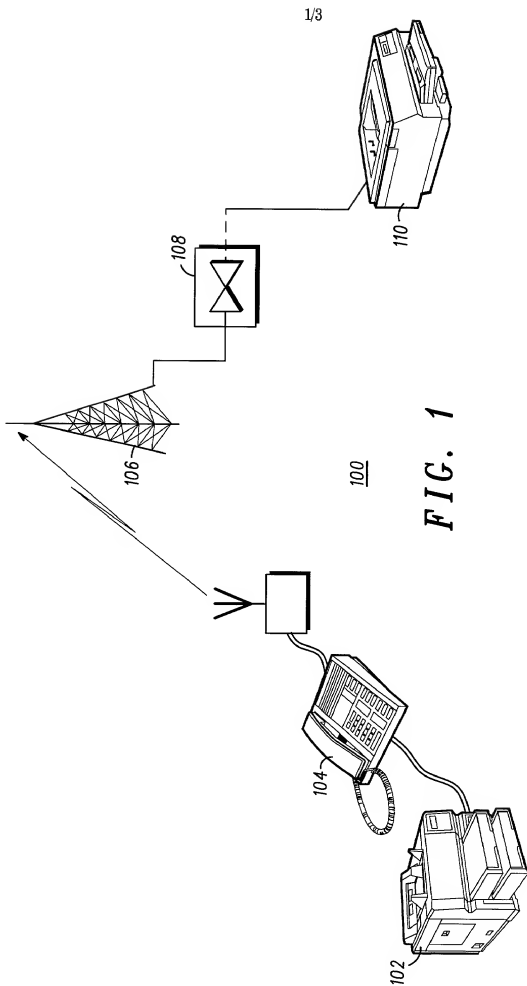


FIG. 1


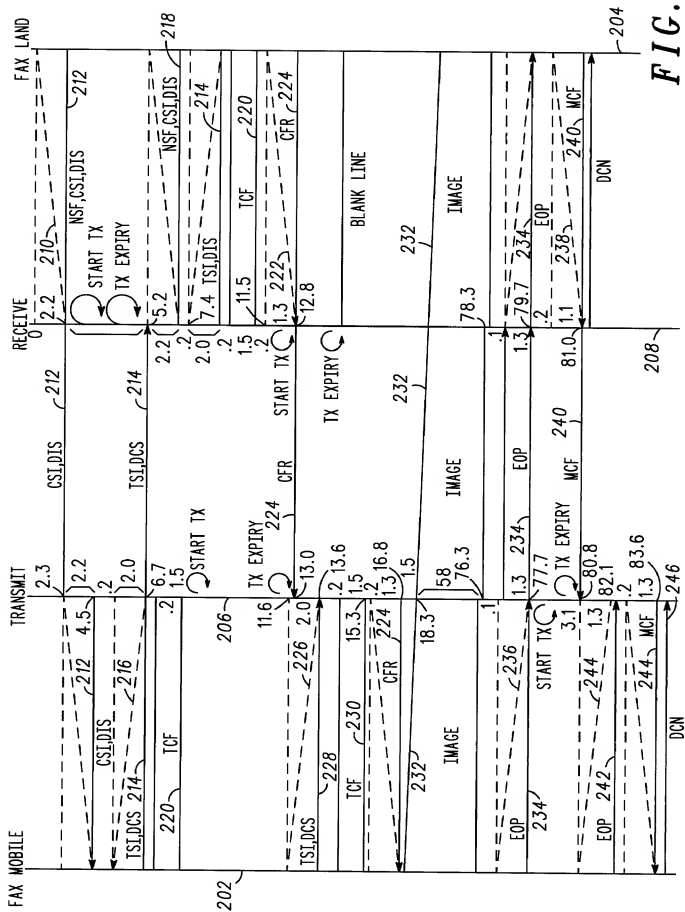


FIG. 2



PATENT APPLICATION DECLARATION
COMBINED WITH POWER OF ATTORNEY

Attorney's Docket No.: CE03978R

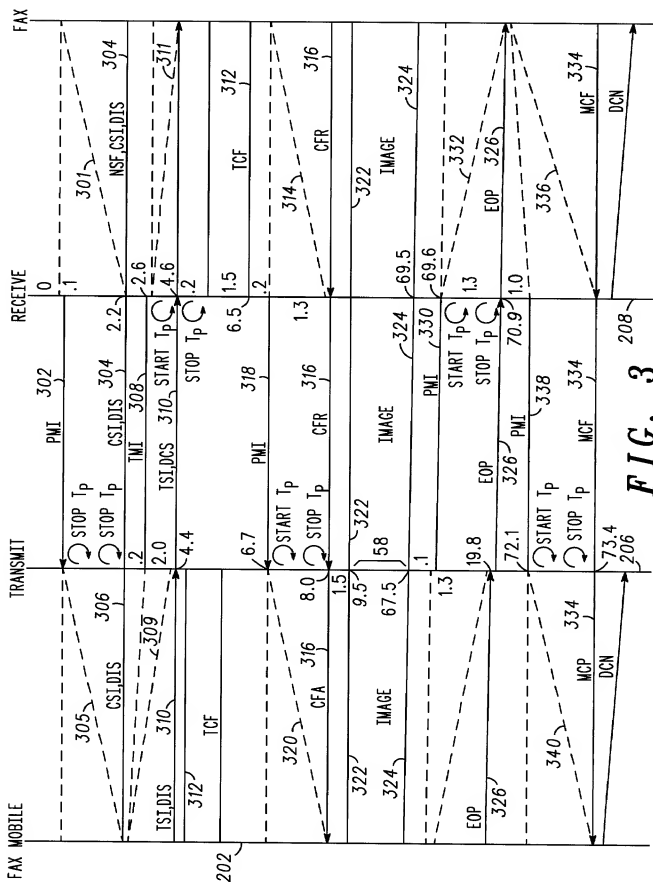

Regular (Utility)



Design Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR REDUCING ANALOG FACSIMILE CALL DURATION OVER CDMA

the specification of which:



is attached hereto



was filed on: _____

as U.S. Serial No.: _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 CFR § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):



no such application(s) filed



such application(s) identified as follows:

Application Number	Country	Date of Filing (day, month, year)	Priority Claimed	
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Provisional Application Serial No.: _____

Provisional Application Filing Date: _____

I hereby claim the priority benefit under 35 USC §120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Prior U.S. Application(s):



no such application(s) filed



such application(s) identified as follows:

U.S. Parent Application No. or PCT Parent No.	Filing Date (day, month, year)	Status (Patented, Pending, Abandoned)

AS A NAMED INVENTOR, I HEREBY APPOINT THE FOLLOWING REGISTERED ATTORNEY(S) OR AGENT(S) TO PROSECUTE THIS APPLICATION AND TO TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH:

CUSTOMER NUMBER 22917

Send correspondence to Customer Number **22917**

Address all telephone calls to:
Kenneth A. Haas at (847) 576-0379
Fax (847) 576-3750

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 USC and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first-named or sole inventor			JANUSZ HYZIAK		
Inventor's signature		<i>Janusz Hyziak</i>		Date	9/11/2000
Residence	Des Plaines			IL	
	City			State or Foreign Country	
Citizenship	USA				
	Country				
Post Office Address		9352 Margail			
		Street Address			
Des Plaines		IL		60016	
City		State or Country		Zip Code	

Full name of second-named joint inventor			SAURABH RASTOGI		
Inventor's signature		<i>Saurabh Rastogi</i>		Date	08/10/2000
Residence	Patpar Ganj			Delhi, India	
	City			State or Foreign Country	
Citizenship	India				
	Country				
Post Office Address		39 Ankur Apartments, 7			
		Street Address			
Patpar Ganj		Delhi, India		110092	
City		State or Country		Zip Code	

Full name of third-named joint inventor <u>SCOTT FINKLE</u>		
Inventor's signature <u>Scott Finkle</u>	Date <u>7/11/2000</u>	
Residence <u>Hoffman Estates</u>	IL	
City	State or Foreign Country	
Citizenship <u>USA</u>	Country	
Post Office Address <u>1345 Meyer Road</u>	Street Address	
<u>Hoffman Estates</u>	<u>IL</u>	<u>60194</u>
City	State or Country	Zip Code